


Universal control board for 12VDC swing gate operators

- Excellent for solar applications
- Simple to install and configure
- Smart battery charging management
- LED feedback for easy programming
- Adjustable speed control
- Dual gate synchronization
- Plug & play retrofit of 600 and 800 series board
- Compatible with BlueBus (up to 6) or 300Hz (up to 2) monitored devices
- For linear actuator applications only
- 2 relays (non programmable)

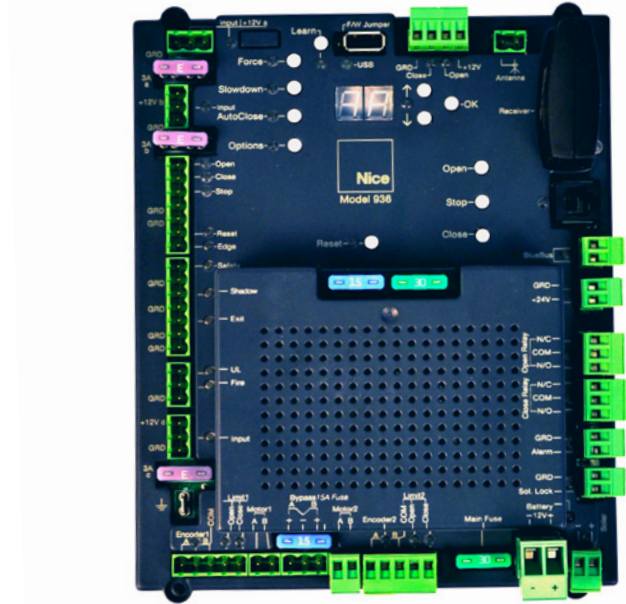

936US Control Board

Technical Specifications

Model	936US
Battery power	12 VDC
Maximum power	20A
Maximum accessories power	Regulated 12V/24V - 300mA (1 location each) Fused power - 3A (3 locations)
Working time	120 seconds
Maximum pause time	120 seconds
Board dimensions	6.5w x 8.5h x 2.25d inches
Approvals	ETL

